



BF 60.1

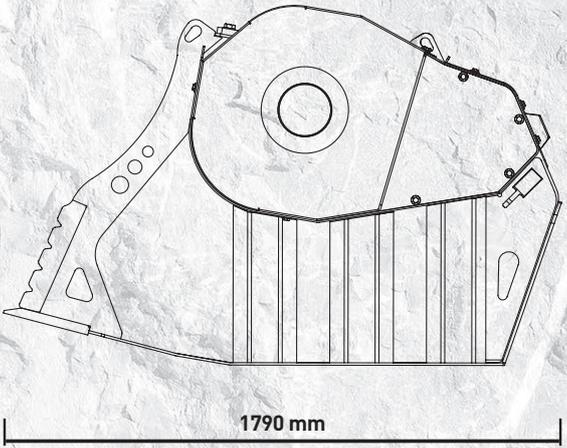

1790 mm

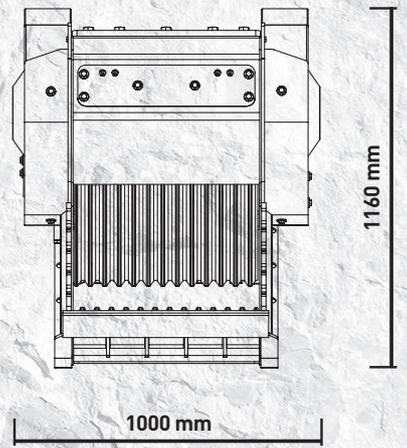

1160 mm

1000 mm

“Small but for **great needs**”



Urban construction sites and limited work spaces are the ideal application for the BF 60.1 crusher bucket, regardless of the crushing job.

Suitable for excavators starting from 8 Ton, the BF 60.1 weights approximately 1,50 Ton and has a capacity of approx. 0,55 m³.

The mouth opening measures to 610x510 mm to ensure an optimal production rate of 19,80 m³/h.



AREAS OF APPLICATION

DEMOLITION
RECYCLING
EXCAVATION
ROAD WORKS

SPECIFICATIONS

| RECOMMENDED EXCAVATOR | LOAD CAPACITY | OPENING DIMENSIONS | OUTPUT SETTING | DIMENSIONS |
|-----------------------|---------------------|--------------------|----------------|-------------------------|
| ≥ 8 Ton | 0,55 m ³ | L 610 H 510 mm | ≥ 15 ≤ 110 mm | 1790 x 1000 H 1160 mm |
| OIL FLOW | PRESSURE | COUNTER PRESSURE | WEIGHT | MAXIMUM PRODUCTION |
| 98 l/min. | 215 bar | 10 bar | 1,50 Ton | 19,80 m ³ /h |

ACCESSORIES

| RECOMMENDED SPARE PARTS KIT | FIX COUPLER | QUICK FEMALE COUPLER | IRON SEPARATOR | HOUR METER |
|-----------------------------|-------------|----------------------|-------------------------|--------------------|
| BF6010028 | FC6010000 | BF6010000 | BF6010010 | 804MBNF01 |
| | | | DUST SUPPRESSION KIT | 24 MONTHS WARRANTY |
| | | | KNMB00L-KNMB00S-KNMB00M | WA246010 |